

Power Management

PMICs PMICs

Power Conversion

Power Modules Switching Regulators Switching Controllers DDR Termination LDOs & Regulators

System Controls

USB Power Switches Voltage References Supervisors

LED Lighting

Switching Regulators





USB Power Switches......15

Voltage References......15

Supervisors.......15

Switching Regulators.....17

LED Lighting......17

Power Management Portfolio

PMICs										
Triple PMICs	Quad F	PMICs								
XRP7713	XRP7704	XRP7740								
XR77103	XRP7714	MxL7704-B								
XR77103-A0R5										
XR77103-A1R0										
XR77103-G1R2										
XR77103-MoCA										

Power Conver	sion										
Power	Step-Do	wn Switching Re	gulators	Switching Controllers	Linear						
Modules	>22V	>6V	<6V	Step-Down		DDR Termination					
XR79103	SP7650	XR76108	SP6669	SP6132H	LP2951	SPX1117	SPX2941	XRP2997			
XR79106	SP7652	XR76112	XRP6658	SP6134H	SP6205	SPX1582	SPX2945				
XR79110	XR76203	XR76117		XRP6124	SP6213	SPX1585	SPX2954				
XR79115	XR76205	XR76121		XRP6141		SPX1587	SPX3819				
XR79120	XR76208	MxL76125		XR75100		SPX2815	SPX3940				
XR79203						SPX29152	SPX5205				
XR79206						SPX29300	XRP29302				
MxL7218						SPX29301	XRP6272				
MxL7225						SPX29302					
MxL7225-1											

Power S	Switches	Valtage D		Supervisors				
Single	Dual	voitage R	eferences					
SP2525A	SP2526A	SPX1431	SPX2431	SP691A	SP705	SP706		
	XRP2526	SPX385		SP706R	SP706S	SP706T		
		SPX432		SP707	SP708	SP708S		
				SP708T	SP809	SP809N		
				SP813L				

LED Lighting	
	Switching Regulators
	Step-Down Step-Down
	XRP7613

MaxLinear's PMICs range from simple 3 output devices in tiny 4x4mm packages to I2C programmable devices with as many as 5 outputs scalable to outputs of greater than 30Amps. PMICs reduce system complexity with fewer components. Those with I2C interfaces offer dynamic voltage scaling, sequencing configurability, fault management and telemetry. Easy to use configuration software tools speed development and significantly reduce overall time to market. MaxLinear also offers optimized PMIC solutions for our G.hn chipset and MoCA SoCs.

Applications

- G.hn and MoCA Networking Solutions
- 5G RRUs and AAS Telecommunications Equipment

3.3V or 5V selectable LDO

■ Integrated MOSFET drivers

- FPGA, DSP and ASIC power systems
- Industrial and embedded systems

PMICs Programmable **Gate Drive** VIN VIN VOUT Frequency Up/Down MIN MAX MIN Internal Range NVM Part Number Ch. (Ω) (V) (V) (V) MOSFETs (mA) (MHz) Technology Package Features Svnchronous ЗА UVLO, OTP, soft-start XR77103 3 2A 4.5 14 0.8 1.5 Light load efficiency - PFM and PWM mode 0.3 to 2.2 **FFPROM** TOFN-32 2A Overcurrent and output overvoltage protection ■ I2C reconfigurable зА 0.9 0.9 XR77103-3 2A 1.8 1.8 0.560 MoCA 2A 3.3 3.3 ЗΔ XR77103-3 2A 8.0 6 1 Synchronous A1R0 2A UVLO, OTP, soft-start Pre-4.5 Yes 1.5 TQFN-32 Light load efficiency, PFM and PWM mode programmed ЗА XR77103- Overcurrent and output overvoltage protection 3 2A 8.0 6 0.5 AOR5 2A ЗА 1.1 1.1 XR77103-3 2Α 1.5 1.5 1.140 G1R2 2A 3.3 3.3 ■ Two configurable power good outputs 1.5A 3.0 ■ LDO and 2-input 8-bit ADC 1.5A 1.3 MxL7704-B 4 4.5 5.5 No 8 QFN32 1 to 2.1 Factory Only 2.5A 8.0 Temperature monituring 0.6 4A Supported by Excel configuration tool 3 XRP7713 TQFN-32 Digital PWM controller 6/3 4.75 25 0.9 No 9 0.3 to 1.5 OTP Faults, warnings, sequencing, GPIOs and PID 4 XRP7714 TQFN-40 compensation are all I²C reconfigurable



0.3 to 1.5

OTP

TQFN-40

XRP7704

XRP7740

4

4

-/-


3/1.8

6.5 20


0.9

Nο

9

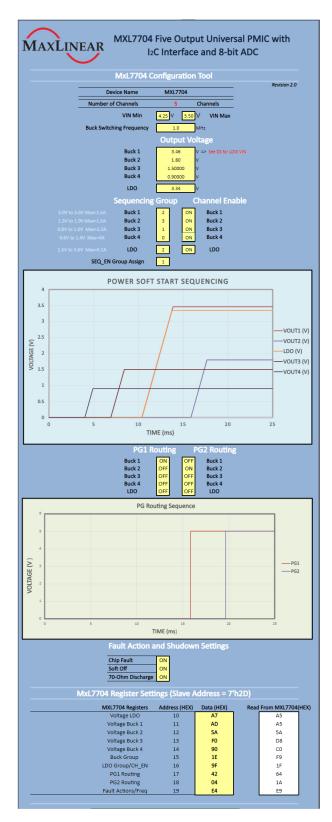


MxL7704-B Excel Configuration Tool

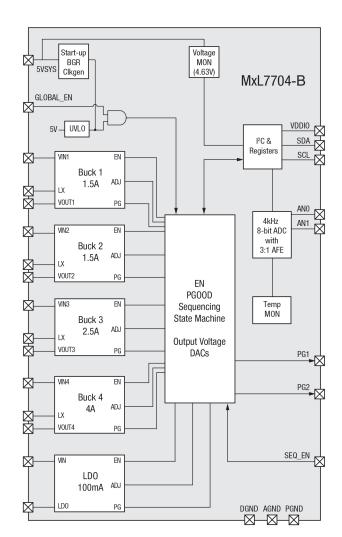


MxL7704-B Functional Block Diagram

PMIC Solutions for MaxLinear SoCs


MaxLinear has configured two versions of the XR77103 as dedicated solution for our MoCA and G.hn SoCs. These solutions have been qualified together with the SoC and Ethernet PHY peripherals to ensure the optimal signal path performance. Having a proven power solution minimizes risk and speeds time to market.

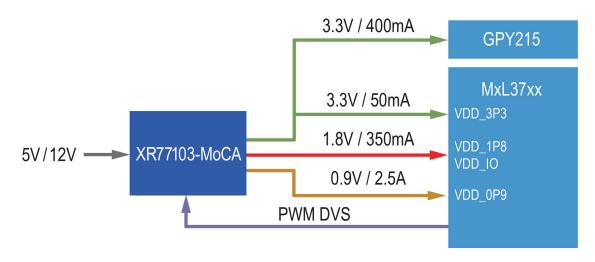


MoCA SoC and Ethernet PHY Power Solution

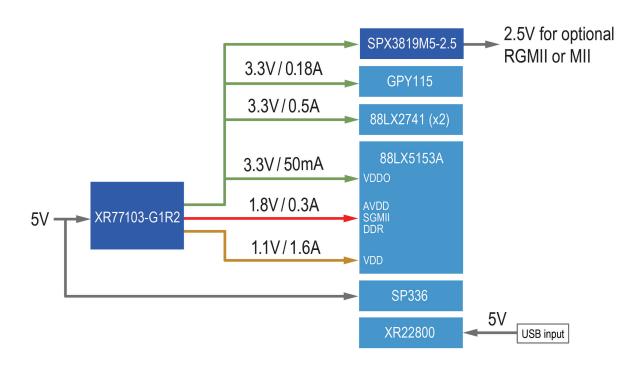

DMI920 G.hn Industrial Multi-Medium, Multi-Interface IIoT EVK

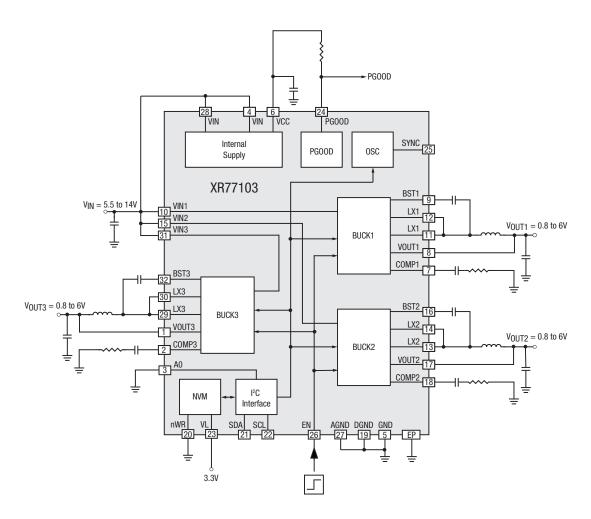


Universal PMIC 3-Output Programmable Buck Regulator Typical Application

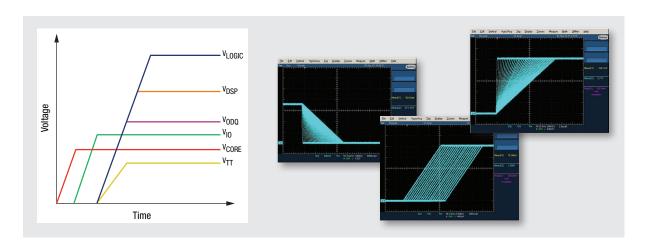

Control Power Up/Down Sequencing with Different Delays and Slopes using PowerArchitect™

PowerArchitect - Configuration Software

MaxLinear's PowerArchitect interactive design tool enables you to create a complete 4- to 6-channel optimized power supply design with complex sequencing and advanced power management features, all with a few clicks of the mouse. A free download of PowerArchitect is available at https://www.maxlinear.com/support/design-tools/powerarchitect

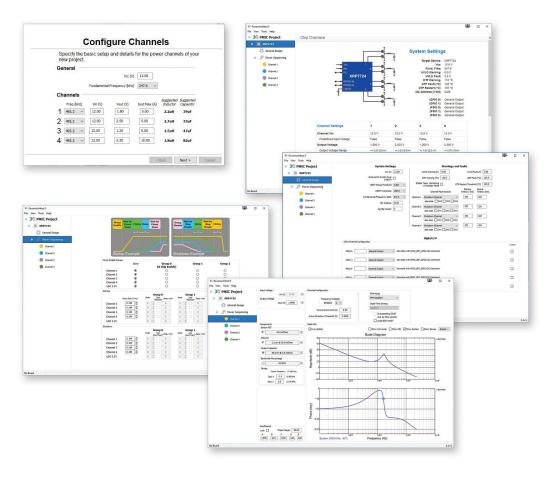


Evaluation Boards

Evaluation boards for all programmable power management devices are available, along with their user manuals.

Complete Programmable Power Kits Available



Zynq-7000 Power System Featuring XRP7714

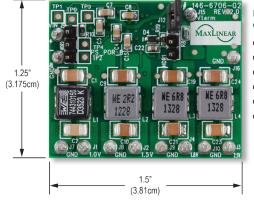


Ready-made configurations for:

- Zynq-7XXX
- i.MX5 and i.MX6
- Smartfusion2
- Cyclone IV
- Cyclone V SOC
- Intel Wellsburg

Power Modules


MaxLinear's power modules address high-current solutions for various end applications. These synchronous step-down power modules are complete system-in-package power management solutions with fully integrated power converters including MOSFETs, inductors and internal input and output capacitors. Our XR79xxx modules utilize a patented emulated current mode Constant On-Time (COT) control that provides exceptional full range 0.1% line regulation and 1% output accuracy over the full temperature range. This COT control loop enables operation with ceramic output capacitors, eliminating loop compensation components.

Our QFN modules provide superior thermal performance and manufacturability, all in the smallest footprint. The QFN package makes visual inspection of solder joints possible and eases electrical debugging. At 85°C with no airflow, no thermal de-ratings are required for output voltages of 1.8V and below.

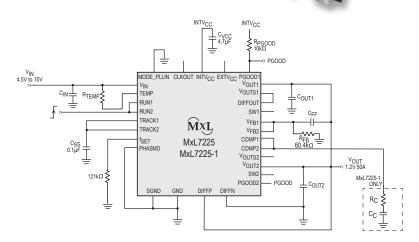


Typical Application

- FPGA, DSP and ASIC power systems
- Base stations
- Repeaters
- Networking
- Telecommunications
- Industrial and embedded systems



MxL7225 Efficiency 12V_{IN}

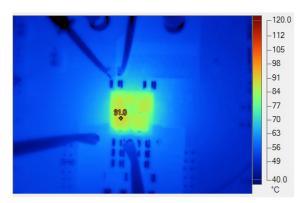


MxL7225 Thermal Image

Part Number	Ch.	Output Current (A)	V _{IN} Range (V)	V _{OUT} Range (V)	Frequency (kHz)	Efficiency (%)	X-Y Dimension (mm)	Z Dimension (mm)	Package	Features		
XR79203		3	3 to 40	0.6 to 13.2	400 to 800	95	8 x 8					
XR79206		6	3 to 40	0.6 to 13.2	400 to 800	95	10 x 10					
XR79103		3	3 to 22	0.6 to 5.5	600 to 800	95	6 x 6			■ Patented COT control		
XR79106	1	6	3 to 22	0.6 to 5.5	600 to 800	95	8 x 8	4	QFN	 UVLO, OTP, soft-start, adjustable hiccup current limit and short-circuit protection 		
XR79110		10	3 to 22	0.6 to 5.5	400 to 800	96	10 x 10			■ PGOOD		
XR79115		15	3 to 22	0.6 to 5.5	400 to 600	96	12 x 12					
XR79120		20	3 to 22	0.6 to 5.5	400 to 600	93	12 x 14					
MxL7218	2	18	4.5 to 15	0.6 to 1.8	400 to 780	95	16 x 16	5.01	BGA	PFM Adjustable frequency and soft start UVLO, OTP, and over current/over		
MxL7225/ MxL7225-1	2	25	4.5 to 15	0.6 to 1.8	400 to 780	93	16 x 16	5.01	BGA	voltage/short-circuit protection Frequency synchronization PGOOD		


Power Solutions for MaxLinear SoCs



MxL31712/08 Wi-Fi 7 SoC Core Power Solution

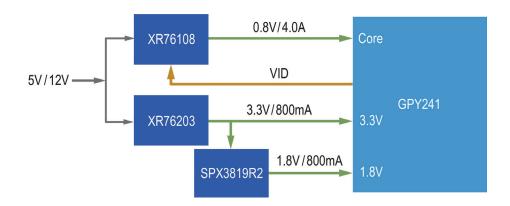

GPY241/245 Quad 2.5Gb Ethernet PHY
Power Solution

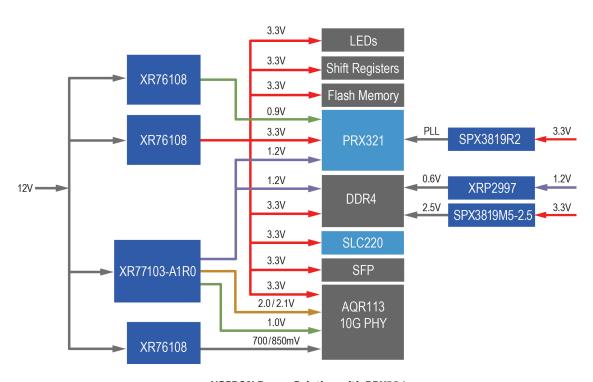

XGSPON Power Solution with PRX321
10G PON SoC and SLC220 Dual-Channel SLIC

Step-Down Switching Regulators

MaxLinear's family of synchronous and non-synchronous step-down regulators provides a fully integrated single-chip solution for Point-of-Load (POL) applications with high current output requirements. With high input voltage range and operating switching frequency options, these regulators fit in a wide range of applications and power architectures by enabling step-down DC/DC conversions from various intermediate power bus levels and providing a highly efficient and high performing solution in the most compact footprint.

- Home Gateways and Routers (CPE)
- Point-of-Load (POL) converters
- Point-of-Load (POL) modules
- FPGAs, DSPs and processor power supplies


Part	Output Current	Frequency		rating ige (V)	Output	Output \		Accuracy	Efficiency	Package		
Number	(A)	(kHz)	Min	Max	Voltage	Min	Max	(%)	(%)	(mm)	Features	
XR76203	3								95		■ Patented COT control	
XR76205	5	100 to 800	3	40	Adj.	0.6	30	0.5	96	5x5 QFN	■ UVLO, OTP, soft-start, hiccup, PGOOD	
XR76208	8								96	•	Current limit and short protection	
SP7650	3	300	2.5	28	Adj.	0.8	27	1	95	7×4 DFN	SynchronousUVLO, OTP, soft-startShort-circuit protection/auto-restart	
SP7652	6	600	2.5	28	Adj.	0.8	27	1	92	7x4 DFN	SynchronousUVLO, OTP, soft-startShort-circuit protection/auto-restart	
XR76108	8									5x5	■ Patented COT control	
XR76112	12	200 to 800	3	22	Adj.	0.6	18	0.5	96	QFN	UVLO, OTP, soft-start, hiccup, PGOODCurrent limit and short protection	
XR76117	15	200 to 800	4.5	22	Adj.	0.6	18	0.5	97	5x6 QFN	■ Patented COT control	
XR76121	20	200 to 800	4.5	22	Adj.	0.6	18	0.5	97	5x6 QFN	UVLO, OTP, soft-start, hiccup, PGOODCurrent limit and short protection	
MxL76125	15	200 to 1250	1	22	Adj.	0.6	18	800	96	QFN-23	 Patented COT control 2-BIT VID UVLO, OTP, soft-start, hiccup, PGOOD Current limit and short protection 	
SP6669	0.6	1500	2.5	5.5	Adj.	0.6	5	2.0	95	S0T23-5	 Synchronous Enable pin Pulse skipping at light load Over temperature protection 	
XRP6658	1	1500	2.5	5.5	Adj.	0.6	5	<3.0	97	S0T23-5	 Synchronous Light load efficiency, PFM and PWM mode Enable pin UVLO and over temperature protection 	

Switching Controllers


Switching controllers, also known as buck controllers or Step-down, are the basic building blocks for high efficiency and high power point-of-loads. Step-down controllers allow maximum flexibility and customization for high performance conversions.

- Distributed power architectures
- Point-of-Load (POL) converters/modules
- Set-top boxes

Doub	Rec. Output		ating ge (V)	Min. Output	Quiescent	F	F.C.		
Part Number	Current (A)	Min	Max	Voltage (V)	Current (µA)	Frequency (kHz)	Efficiency (%)	Package	Features
XR75100	<20	3	40	0.6	700	200 to 800	96	QFN-16	 Proprietary emulated current mode constant on-time architecture No external compensation Adjustable frequency Precision enable, soft-start, force PWM Adjustable temperature compensated current limit
XRP6124	_	3	18					507	Non synchronous, 500ns constant on-time Tankle sing off start.
XRP6124HV	<5	4.5	30	1.2	500	200 to 1000	92	S0T23-5	Enable pin, soft-start UVLO and output short-circuit protection
SP6134H	<15	3	28			600	94		■ Synchronous voltage mode PWM
SP6132H	<20	3	28	0.8	1.5mA	300	95	MSOP-10	Programmable soft-start UVLO, over temperature and output short-circuit protection
XRP6141	<35	3	22	0.6	700	200 to 800	95	QFN-16	Proprietary emulated current mode constant on-time architecture No external compensation Adjustable frequency Precision enable, soft-start, force PWM Adjustable temperature compensated current limit

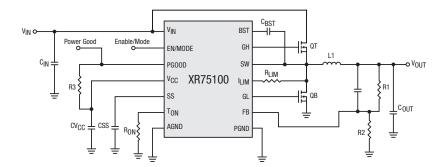

40V Synchronous Step-Down COT Controller



XR75100 Line Regulation

DDR Termination

Part	Output	Output	Accuracy	Operating Voltage (V)		Quiescent Current			
Numbe		Voltage	(%)	Min	Max	(μA)	Package	Features	
XRP29	97 2A	Adjustable	1	1.1	5.5	2	HSOIC-8	DDR I/II/III/IV bus terminationOver temperature protectionOvercurrent protection	


LDOs & Linear Regulators

Maxlinear manufactures a broad line of low dropout linear regulators (LDO). The simplest and lowest cost technique for stepping down a DC voltage, LDOs offer a quiet, well-regulated DC voltage supply with excellent transient response.

- Portable equipment
- Handheld devices
- Mobile phones and PDAs
- Medical and industrial instrumentation

		Output		_T (V) stable	_	Typical Dropout		ating ge (V)	Quiescent			
Part Number	Output Current	Voltage (V)	Min	Max	Accuracy (%)	Voltage (mV)	Min	Max	Current (µA)	Package	Features	
SP6213	100mA	3.3			2.5	250	2.5	7	65	SC70-5	Enable pin Current limiting and thermal protection	
LP2951	100mA	3.3, 5			0.5, 1	380	2.4	30	150	NSOIC-8	Enable pin Output error flag indicator Current limiting and thermal protection	
SPX5205	150mA	Adj., 1.8, 3, 3.3, 5	1.24	15.725	1	210	2.5	16	70	S0T23-5	Reverse battery protection Current limiting and thermal protection	
		5			0.5						S0T223-3	■ Enable pin
SPX2954	250mA	3.3, 5			1	310	2.4	30	150	S0T223-3	Output error flag indicator Current limiting and thermal protection	
SPX2945	400mA	3.3			0.5, 1	420	4.1	30	100	S0T223-3	 Enable pin Output error flag indicator Current limiting and thermal protection	
		Adj., 3, 3.3								S0T23-5	■ Low noise: 12µV _{RMS} (fixed voltage version)	
SP6205	500mA	Adj.	2.7	5.7	2	300	2.7	6	45	DFN-8	 Enable pin Current limiting Over temperature protection	
		Adj., 1.2, 1.5, 1.8, 2.5, 3, 3.3, 5								S0T23-5	■ Enable pin	
SPX3819	500mA	Adj., 1.2	1.235	15.45	1	340	2.5	16	90	DFN-8	Reverse battery protection Current limiting and thermal protection	
		Adj., 5								NSOIC-8		
SPX1117	800mA	Adj., 1.5, 1.8, 2.5, 3.3, 5	1.25	15	1	1100	2.6	15	5mA	S0T223-3	Current limiting and thermal protection	
SPX2941	1A	Adj.	1.24	15.45	3	280	3	16	12mA	T0263-5	Enable pin Reverse battery protection Current limiting and thermal protection	

		Output		_T (V) stable		Typical Dropout		ating ge (V)	Quiescent		
Part Number	Output Current	Voltage (V)	Min	Max	Accuracy (%)	Voltage (mV)	Min	Max	Current (µA)	Package	Features
5D\/20\ 0.1		3.3, 5								S0T223-3	
SPX3940A	4.0	3.3			1	200	2.4	4.5	10.0	T0263-3	Reverse battery protection
CDV2010	1A	2.5, 5				280	3.1	16	18mA	S0T223-3	Current limiting and thermal protection
SPX3940		3.3			2					T0263-3	
SPX2815	1.5A	Adj.	1.25	8.8	1, 2	1100	2.5	10	4mA	T0263-3	Current limiting and thermal protection
SPX29152	1.5A	Adj.	1.25	15.4	1	390	2.5	16	12mA	T0263-5	Enable pin Current limiting and thermal protection
XRP6272	2A	Adj., 5	0.7	5.3	2	550	1.8	6	30	T0252-5 HS0IC-8	Enable and power good functions Current limiting and thermal protection
SPX1582	ЗА	Adj.	1.25	6	2	400	1.8	5.5	5mA	T0263-5	Enable pin External sense pin Current limiting and thermal protection
SPX1587	зА	Adj., 3.3	1.25	8.8	1	1100	2.8	10	4mA	T0263-3	Current limiting Over temperature protection
SPX29300	зА	2.5, 3.3, 5			1	600	2.5	16	37mA	T0263-3	Current limiting and thermal protectionReverse battery protection
SPX29301	ЗА	5			1	600	4	16	37mA	T0263-5	 Enable pin Output error flag indicator Current limiting and thermal protection
SPX29302/ XRP29302	ЗА	Adj.	1.25	16	1	600	2.8	16	37mA	T0263-5	Enable pin Current limiting and thermal protection Reverse battery protection
SPX1585	5A	Adj.	1.2	8.8	1	1100	2.8	10	5mA	TO-263-3	Current limiting and thermal protection

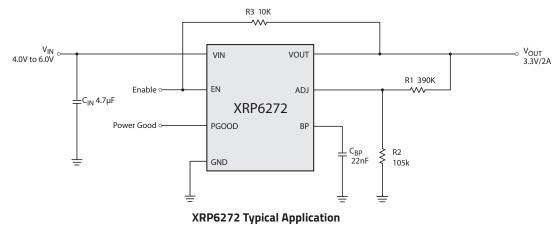

Power Switches

Power switches provide low loss, high efficiency power management, monitoring and fault handling capabilities for any power distribution network. Use of these compact devices results in safer, more stable and more reliable interconnecting systems.

Applications

- USB V_{BUS} power management
- Set-top boxes
- USB peripherals
- Battery charger circuits

D		Operating Voltage (V) Quiescent Current Current							
Part Number	Channel(s)	Current	Limit	Min	Max	Current (μA)	Package	Features	
SP2525A	1	500mA	850mA	3	5.5	75	NSOIC-8	Active high or low enable pin(s)USB 2.0 compliant	
SP2526A	2	500mA	850mA	3	5.5	110	NSOIC-8	 Current limiting Fault flag indicator(s) Over temperature protection Undervoltage lock out protection 	
XRP2526	2	900mA	1.15A	1.8	5.5	65	NSOIC-8	 Active high or low enable pin(s) USB 3.0 compliant Current limiting Blanking fault flag indicator(s) Over temperature/reverse current protection Undervoltage lock out protection 	

Voltage References

Voltage references provide a precise and stable output voltage over a wide range of conditions such as input voltage fluctuations and/ or operating temperature change. These devices guarantee system accuracy and performance.

- Power supplies
- Mother boards
- Medical and industrial instrumentation

Part Number	V _{REF} (V)	Accuracy (%)	Operating Current (mA)	Max Operating Voltage (V)	I _{REF} (μΑ)	Operating Temperature Range (°C)	Temperature Coefficient (ppm/°C)	Package	Features
SPX385	2.5	1	0.01 to 20	_	_	-40 to 85	80	S0T23-3	Shunt referenceReplacement for LM285/385
SPX432	1.24	1	1 to 80	15	3	0 to 105	50	S0T23-3	 V_{REF} adjustable to 15V Replaces TLV431 and AS432
SPX1431	2.5	0.4	1 to 150	36	0.7	-55 to 125	30	S0T89-3	 V_{REF} adjustable up to 36V Replaces TL1431
SPX2431	2.5	0.5, 1	1 to 100	20	0.7	0 to 105	30	S0T23-3	 V_{REF} adjustable up to 20V Replaces TL2431 and AS2431

Supervisors

Supervisory circuits ensure safe operating conditions for microprocessor and memory-based systems. By monitoring one or more system supplies, supervisory circuits provide basic protection such as power-on reset as well as fault monitoring during power-up, power down and undervoltage (brownout) conditions. Additional functions typically include a watchdog timer, a manual reset and battery backup supply switching.

- Mother boards
- Telecom and datacom equipment
- Medical and industrial instrumentation


Part Number	Channel(s)	Reset Threshold (V)	Reset Accuracy	Reset Active	Operating Voltage(V)		Quiescent			
					Min	Max	Current (µA)	Package	Features	
SP691A	1	4.65	125mV	Low/High	1	5.5	35	NSOIC-16 WSOIC-16	 Programmable watchdog timer Back-up battery switchover Power fail, low battery indicator Chip enable gating 	
SP705	1	4.65	150mV	Low	1.1	5.5	40	NSOIC-8	Watchdog timerPower fail, low battery indicatorManual reset	
SP706	1	4.40	150mV	Low	1.1	5.5	40	NSOIC-8	Watchdog timerPower fail, low battery indicatorManual reset	
SP706R	1	2.63	80mV	Low	1.1	5.5	25	NSOIC-8	Watchdog timer Power fail, low battery indicator Manual reset	
SP706S	1	2.93	80mV	Low	1.1	5.5	25	NSOIC-8 MSOP-8	Watchdog timer Power fail, low battery indicator Manual reset	
SP706T	1	3.08	80mV	Low	1.1	5.5	25	NSOIC-8 MSOP-8	Watchdog timerPower fail, low battery indicatorManual reset	
SP707	1	4.65	150mV	Low/High	1.1	5.5	40	NSOIC-8	Power fail, low battery indicatorManual reset	
SP708	1	4.40	150mV	Low/High	1.1	5.5	40	NSOIC-8	Power fail, low battery indicatorManual reset	
SP708S	1	2.93	80mV	Low/High	1.1	5.5	25	NSOIC-8 MSOP-8	Power fail, low battery indicator Manual reset	
SP708T	1	3.08	80mV	Low/High	1.1	5.5	25	NSOIC-8	Power fail, low battery indicator Manual reset	
SP809	1	2.3, 2.6, 2.9	1.50%	Low	0.9	6	1	S0T23-3	140ms reset pulse widthPush-pull output	
SP809N	1	3.1	1.50%	Low	0.9	6	1	S0T23-3	140ms reset pulse widthOpen drain output	
SP813L	1	4.65	150mV	High	1.1	5.5	40	NSOIC-8	Watchdog timerManual reset	

Switching Regulators

Efficiency, performance, size and reliability are rapidly imposing LEDs as the lighting solution of choice in space-constrained portable electronic equipment as well as in architectural and accent lighting fixtures. Maxlinerar's LED lighting products offer compact and efficient solutions for line and battery-operated devices and are capable of driving multiple LEDs in various series or parallel topologies.

- General lighting and display
- Medical and industrial instrumentation
- Keypad and signage backlighting

Part Number	Ch.	Max Current/ Ch.	LEDs/	Operating Voltage (V)		Ref. Voltage	Freq.	Max Output Voltage	Quiescent Current	Efficiency			
				Min	Max	(mV)	(MHz)	(V)	(μΑ)	(%)	Package	Application	Features
XRP7613	1	1.2A	8	7	36	100	<1	36	35	95	S0IC-8	High- powered LED	Hysteretic PFM control Enable and soft-start functions Analog and PWM dimming Dynamic LED current thermal control

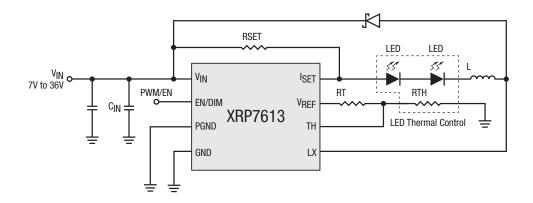

1.2A 36V Step-Down LED Driver

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this guide. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced into, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of MaxLinear, Inc.

EXCEPT AS OTHERWISE PROVIDED EXPRESSLY IN WRITING BY MAXLINEAR, AND TO THE MAXIMUM EXTENT PERMITTED BY LAW: (A) THE MAXLINEAR PRODUCTS ARE PROVIDED ON AN "AS IS" BASIS WITHOUT REPRESENTATIONS OR WARRANTIES OF ANY KIND, INCLUDING WITHOUT LIMITATION ANY IMPLIED OR STATUTORY WARRANTIES AND ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; AND (B) MAXLINEAR DOES NOT GUARANTEE THATTHE PRODUCTS WILL BE FREE OF ERRORS OR DEFECTS. MAXLINEAR PRODUCTS SHOULD NOT BE USED IN ANY EMERGENCY, SECURITY, MILITARY, LIFE-SAVING, OR OTHER CRITICAL USE CASE WHERE A FAILURE OR MALFUNCTION COULD CAUSE PERSONAL INJURY OR DEATH, OR DAMAGE TO OR LOSS OF PROPERTY. USERS ASSUME ALL RISK FOR USING THE MAXLINEAR PRODUCTS IN SUCH USE CASE. CUSTOMERS AND USERS ARE SOLELY RESPONSBILE FOR USING THEIR OWN SKILL AND JUDGMENT TO DETERMINE WHETHER MAXLINEAR PRODUCTS ARE SUITABLE FOR THE INTENDED USE CASE.

MaxLinear, Inc. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

MaxLinear, the MaxLinear logo, any other MaxLinear trademarks (including but not limited to MxL, Full-Spectrum Capture, FSC, AirPHY, Puma, AnyWAN, VectorBoost, MXL WARE, and Panther), and the MaxLinear logo on the products sold are all property of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. All rights reserved.

All third-party product, company names and logos are trademarks[™] or registered[®] trademarks and remain the property of their respective holders/owners. Use of such marks does not imply any affiliation with, sponsorship or endorsement by the owners/holders of such trademarks. All references by MaxLinear to third party trademarks are intended to constitute nominative fair use under applicable trademark laws.

The URLs provided are for informational purposes only; they do not constitute an endorsement or an approval by MaxLinear of any of the products or services of the corporation or organization or individual. MaxLinear bears no responsibility for the accuracy, legality or content of the external site or for that of subsequent links. Contact the external site for answers to questions regarding its content.

