



**** PRELIMINARY ****

MxL93682 and MxL93683

Product Brief 800G PAM4 DSP SoC

General Description

The MxL9368x is a highly integrated PAM4 DSP SoC that enables 800Gbps optical interconnects using 100Gbps over a single optical wavelength (100G/λ).

The device has a high-speed electrical interface with eight transmit (Tx) and receive (Rx) input/output (I/O) that connect electrically through a module connector to the host ASIC. The device also has a high-speed optical side interface that has eight Tx and Rx I/O connecting through the optical components to optical fibers.

The electrical interface supports 106.25Gbps PAM4 signaling per lane over C2M host channels.

The optical interface supports 106.25Gbps PAM4 signaling per wavelength for DR, FR, and LR applications.

The device supports DSP functions including Line-side Tx digital pre-distortion (DPD), transmit pre-emphasis (TX FIR), receiver feed forward equalization (FFE) and decision feedback equalization (DFE).

The MxL9368x, in a 12mm × 12mm package, includes integrated TOSA drivers with differential and single ended options for both SiPh and EML implementations. It offers exceptional signal integrity for 112G signals in a compact footprint suitable for next generation optical module form-factors such as QSFP-DD800 and OSFP.

Applications

- QSFP-DD800 optical modules
- QSFP-DD optical modules
- OSFP optical modules

Features

- 800G capacity that enables 800G PSM8, DR8, 2xFR4, 2xLR4 and 400G DR4, FR4, LR4.
- 800G to 100G break-out mode
- Tx equalization includes pre-emphasis, digital predistortion, and reflection cancellation
- Rx equalization includes CTLE, multi-tap FFE and DFE, and reflection cancellation
- Integrated crystal oscillator eliminates the need for a costly reference clock source
- Small package size to enable the QSFP-DD space requirements
- BER monitoring
- SNR/Histogram reporting for each receiver on both electrical and optical interfaces
- Diagnostic loop-back and test pattern generation and error checking
- SPI and I²C slave interface to communicate to module MCU
- SPI master for flash memory interface
- I²C master interface for TIA direct control
- Embedded CPU for real-time control
- Squelch function when loss of signal (LOS) or loss of lock (LOL) is detected

Supported Standards

- OIF-CEI-56G-VSR-PAM4, OIF-CEI-112G-VSR-PAM4
- IEEE Std 802.3bs, 802.3cd, P802.3ck, P802.3cu

**** PRELIMINARY ****

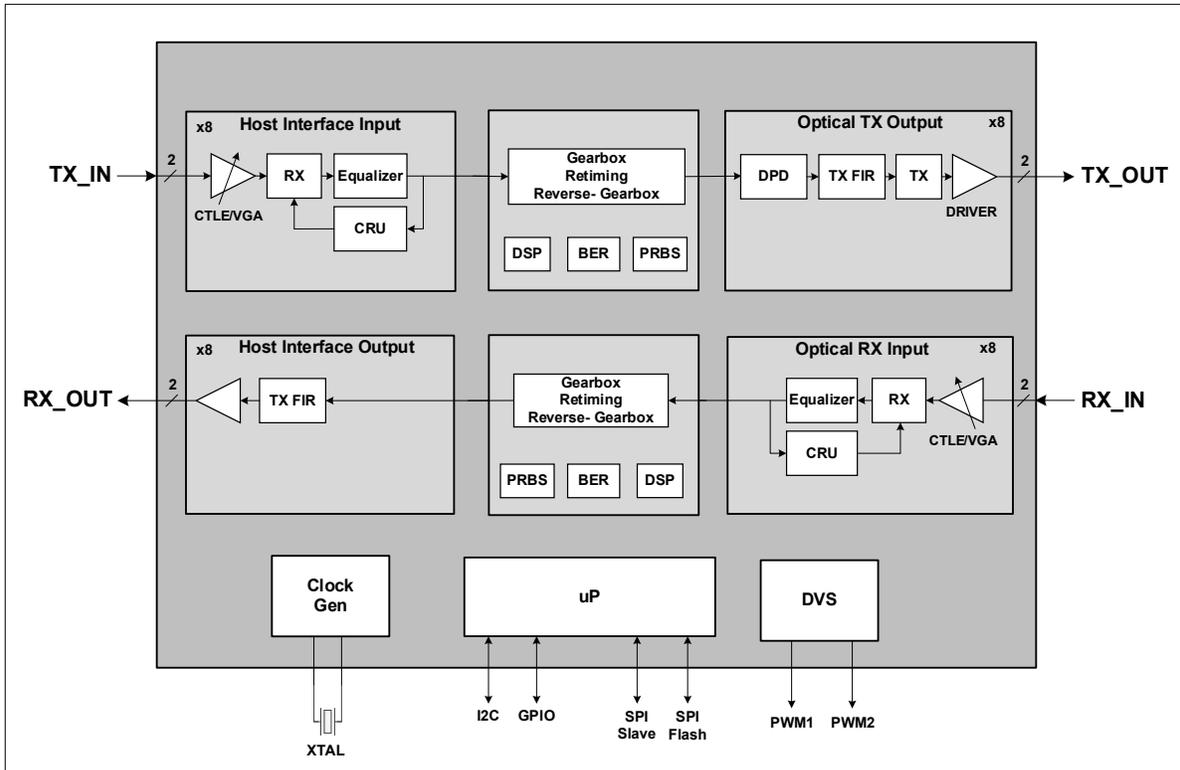


Figure 1: MxL9368x Simplified Block Diagram

Ordering Information

Marketing Part Number	Ordering Part Number	Description	Package	Shipping
MxL93682	MxL93682-AP-T	800G DSP with integrated driver	FCFBGA 12mm x 12mm	Tray
MxL93683	MxL93683-AP-T	800G DSP without integrated driver		

**** PRELIMINARY ****

MxL93682_MxL93683 Preliminary Product Brief



MaxLinear, Inc.
5966 La Place Court, Suite 100
Carlsbad, CA 92008
Tel.: +1 (760) 692-0711
Fax: +1 (760) 444-8598

www.maxlinear.com

The content and information contained in this document is furnished for informational or general marketing purposes only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors, inaccuracies, or incompleteness that may appear in the informational content contained in this guide.

Reproduction, in part or whole, without the prior written consent of MaxLinear, Inc. is prohibited. MaxLinear, the MaxLinear logo, and any MaxLinear trademarks; MxL, Full-Spectrum Capture, FSC,G.now, AirPHY, Puma, and AnyWAN are all trademarks of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. Other company trademarks and product names appearing herein are the property of their respective owners.

© 2021 MaxLinear, Inc. All rights reserved.